


# Series 11-MSQ

Rack & Pinion Type Rotary Table


Size: 1, 2, 3, 7, 10, 20, 30, 50

## How to Order

**Size: 1, 2, 3, 7**

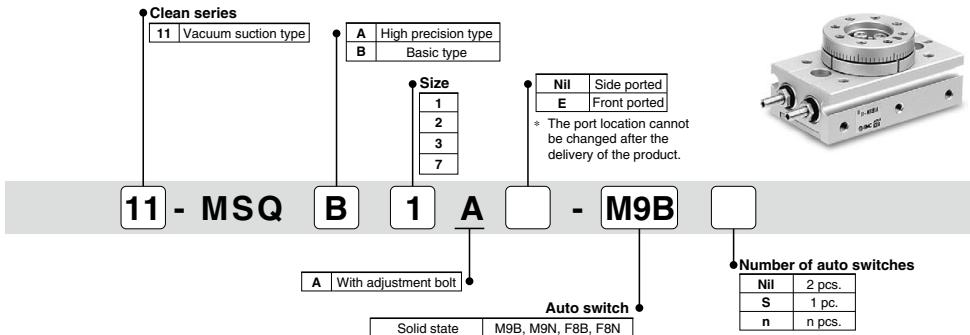

**Size: 10, 20, 30, 50**

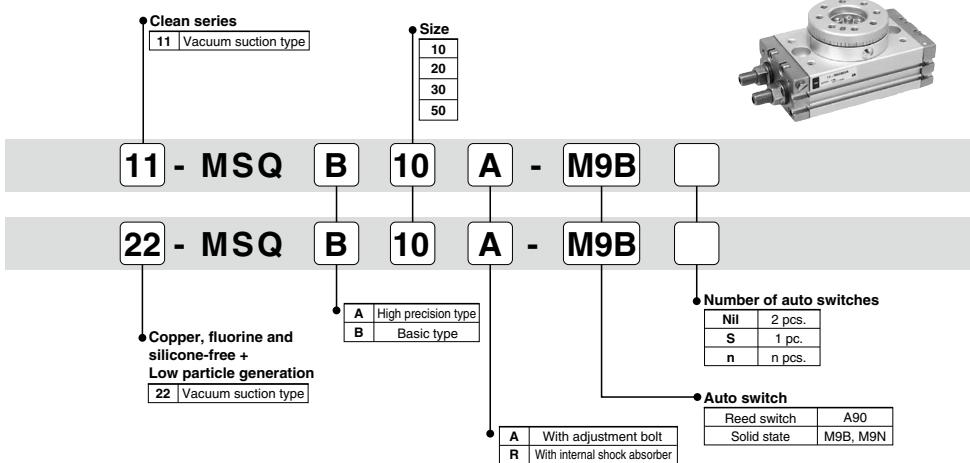

## Auto Switch Specifications

Type	Auto switch model	Load voltage	Load current range	Indicator light	Applicable load
Reed auto switch	D-A90	24 VAC or less, 48 VAC or less, 100 VAC or less 24 VDC or less, 48 VDC or less, 100 VDC or less	50 mA, 40 mA, 20 mA	No	IC circuit, Relay, PLC
Solid state auto switch	2-wire D-M9B, D-F8B 3-wire D-M9N, D-F8N	24 VDC (10 to 28 VDC) 24 VDC (4.5 to 28 VDC)	2.5 to 40 mA 40 mA or less	Yes Yes	24 VDC relay, PLC 24 VDC relay, PLC

Refer to page 920 for the applicable auto switch list.

## Specifications

Size	1	2	3	7	10	20	30	50
Fluid	Air (Non-lube)							
Maximum operating pressure	With adjustment bolt	0.7 MPa		1 MPa				
	With internal shock absorber		Not available		0.6 MPa			
Minimum operating pressure	Basic type			0.1 MPa				
	High precision type		0.1 MPa		0.2 MPa	0.1 MPa		
Ambient and fluid temperature				0 to 60°C (No freezing)				
Cushion	With adjustment bolt	Not available		Rubber bumper				
	With internal shock absorber		Not available		Shock absorber			
Allowable kinetic energy (mJ)	With adjustment bolt	1	1.5	2	6	7	25	48
	With internal shock absorber				39	116	116	294
Angle adjustment range				0 to 190°				
Maximum rotating angle				190°				
Rotation time adjustment range	With adjustment bolt	0.2 to 0.7 s/90°		0.2 to 1.0 s/90°				
	With internal shock absorber		Not available		0.2 to 0.7 s/90°			
Port size	M3 x 0.5		M5 x 0.8		Rc 1/8, M5 x 0.8			
Grease		11-: Fluorine grease						
		22-: Lithium soap based grease						
Cleanliness class (ISO class)		11-: Class 3						
		22-: Class 3						

## Suction Flow Rate of Vacuum Suction Type (Reference values)


Size	Suction flow rate L/min (ANR)
1/2/3/7	10 <sup>*1</sup>
10/20/30/50	

\*1 When using the ZH10DSA

## Rotation Range Example

- The rotary table turns in the clockwise direction when the A port is pressurized, and in the counterclockwise direction when the B port is pressurized.
- By adjusting the adjustment bolt, the rotation end can be set within the ranges shown in the drawing for the desired rotation angle.
- The rotation angle can also be set on a type with internal shock absorber.

### Size: 1 to 7

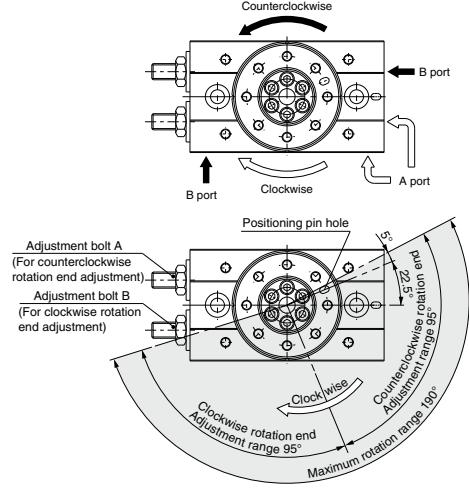


Note) · The drawing shows the rotation range of the positioning pin hole.  
· The pin hole position in the drawing shows the counterclockwise rotation end when the adjustment bolts A and B are tightened equally and the rotation is adjusted 180°.

### With adjustment bolt, internal shock absorber

Size	Adjustment angle per rotation of angle adjustment bolt
1	8.2°
2	10.0°
3	10.9°
7	10.2°

### Size: 10 to 50

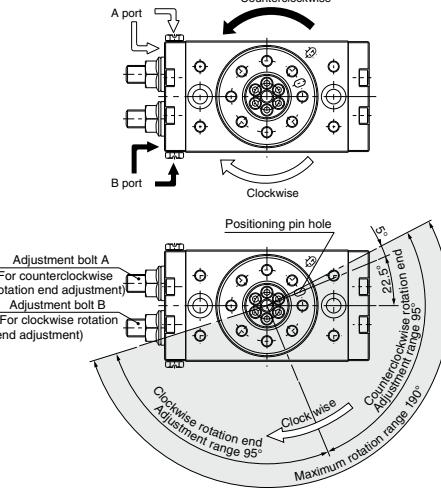

Note) · The drawing shows the rotation range of the positioning pin hole.  
· The pin hole position in the drawing shows the counterclockwise rotation end when the adjustment bolts A and B are tightened equally and the rotation is adjusted 180°.

### With adjustment bolt, internal shock absorber

Size	Adjustment angle per rotation of angle adjustment bolt
10	10.2°
20	7.2°
30	6.5°
50	8.2°

Directional Control Valves

Air Cylinders

Air Grippers

Air Preparation Equipment

Pressure Control Equipment


Fittings & Tubing

Flow Control Equipment


Pressure Switches/  
Pressure Sensors

**Auto Switch Proper Mounting Position (Detection at Rotation End)**

Size: 1 to 7

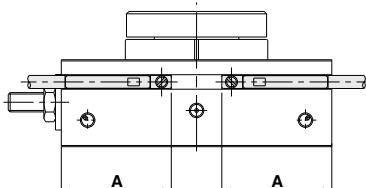

D-F9, M9

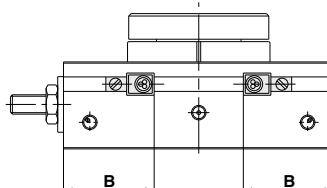


D-F8

Size	Rotating angle	Solid state auto switch					
		D-M9□			D-F8□		
		A	Operating angle θ m	Hysteresis angle	B	Operating angle θ m	Hysteresis angle
1	190°	20.9	49°	10°	16.9	20°	10°
2	190°	22.8	50°	10°	18.8	20°	10°
3	190°	24.4	47°	10°	20.4	15°	10°
7	190°	28.7	31°	10°	24.7	15°	10°

Operating angle θ m: Converts the operating range (Lm) of the auto switch into the rotation angle

Angle of hysteresis: The hysteresis of the auto switch is converted to degrees.


Size: 10 to 50

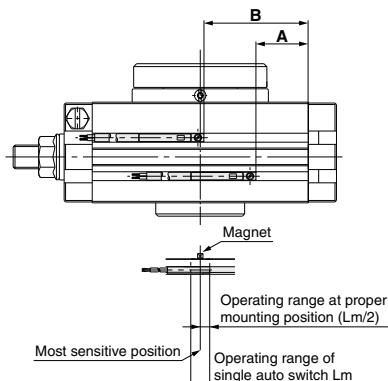

Size	Rotating angle	Reed auto switch				Solid state auto switch			
		D-A9□, D-A9□V				D-M9□			
		A	B	Operating angle θ m	Hysteresis angle	A	B	Operating angle θ m	Hysteresis angle
10	190°	27	45	90°	10°	31	49	42°	10°
20	190°	35	62	80°	10°	39	66	35°	10°
30	190°	39	68	65°	10°	43	72	30°	10°
50	190°	49	83	50°	10°	53	87	24°	10°

Operating angle θ m: Converts the operating range (Lm) of the auto switch into the rotation angle

Angle of hysteresis: The hysteresis of the auto switch is converted to degrees.

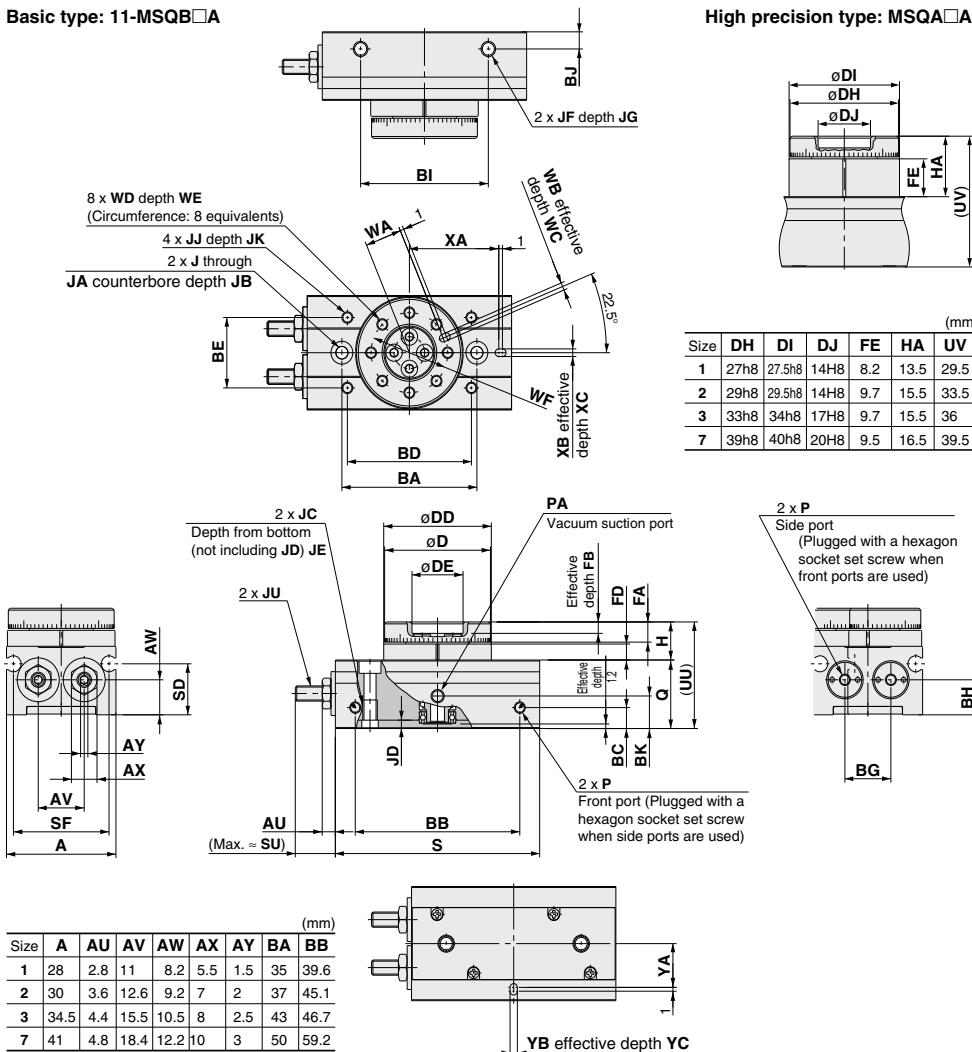**Dimensions: Size 1, 2, 3, 7****Basic type: 11-MSQB□A**

Size	BC	BD	BE	BG	BH	BI	BJ	BK	D	DD	DE	FA	FB	FD	H	J	JA	JB	JC	JD	JE	JF	JG
1	4.5	32	17	11	8.2	30	4.5	5.3	27h9	27.5h9	14H9	4.8	2	3.7	9	3.3	6	3.5	M4 x 0.7	2.2	5.3	M4 x 0.7	4
2	5.5	34	18.5	12.6	9.2	7	2	37	45.1														
3	5.5	38	23	15.5	10.5	40	4.5	9.5	33h9	34 h9	17H9	5.3	2.5	4.2	10	3.3	6	3.5	M4 x 0.7	2.2	5.3	M4 x 0.7	4
7	5.5	45	30	18.4	12.2	50	5	7	39h9	40 h9	20H9	6.5	2.5	4.5	11.5	4.2	7.5	4.5	M5 x 0.8	2.5	6	M5 x 0.8	5

Size	JJ	JK	JU	P	PA	Q	S	SD	SF	SU	UU	WA	WB	WC	WD	WE	WF	XA	XB	XC	YA	YB	YC
1	M3 x 0.5	3.5	M3 x 0.5	M3 x 0.5	M3 x 0.5	16	50.5	10.8	24.4	9.4	25	9.5	2H9	2	M3 x 0.5	4.8	20	22.5	2H9	2	11	2H9	2
2	M3 x 0.5	3.5	M4 x 0.7	M3 x 0.5	M3 x 0.5	18	56	13.4	26.2	11.3	28	10	2H9	2	M3 x 0.5	5.3	21	24.5	2H9	2	11.5	2H9	2
3	M3 x 0.5	3.5	M5 x 0.8	M3 x 0.5	M3 x 0.5	20.5	60	15.2	31	11.8	30.5	12	2H9	2	M3 x 0.5	5.3	25	27	2H9	2	13.5	2H9	2
7	M4 x 0.7	4.5	M6 x 1	M5 x 0.8	M5 x 0.8	23	73.5	15.4	37.4	14.9	34.5	14	3H9	3	M4 x 0.7	6.5	29	32.5	3H9	3	15.5	3H9	3

Directional Control Valves

Air Cylinders

Rotary Actuators

Air Grippers

Air Preparation Equipment

Pressure Control Equipment


Fittings &amp; Tubing

Flow Control Equipment

Pressure Sensors


## Dimensions: Size 10, 20, 30, 50

Basic type: 11-  
22-MSQB□A

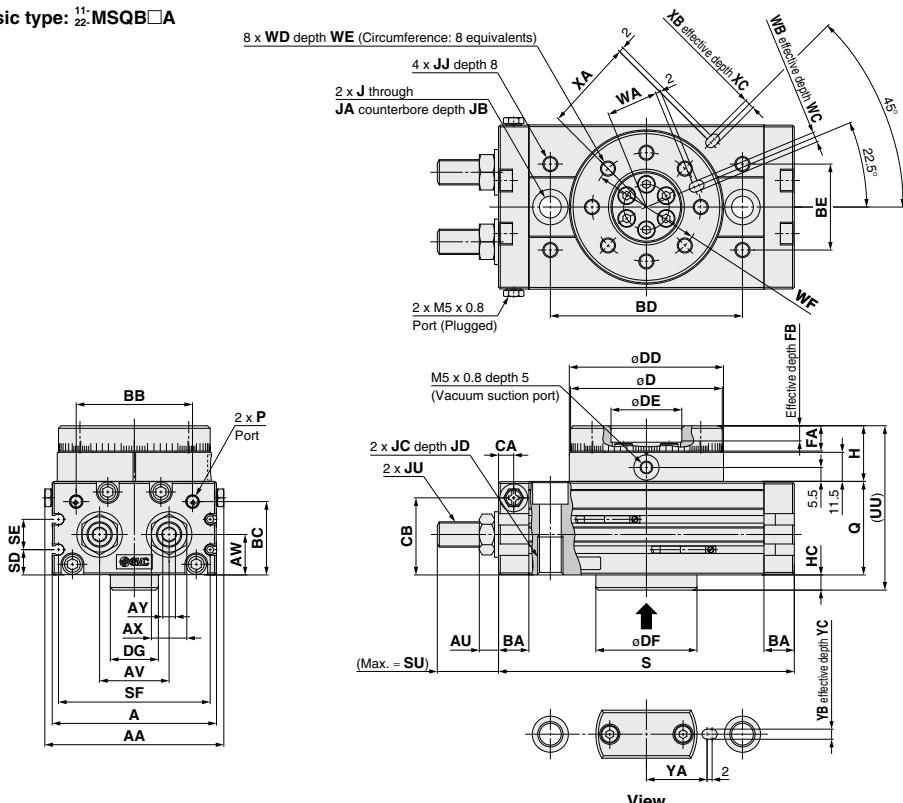

### With internal shock absorber


11-  
22-MSQA□R  
11-  
22-MSQB□R



Size	FU
10	31.5
20	34.7
30	34.7
50	51.7

### High precision type

11-  
22-MSQA□A

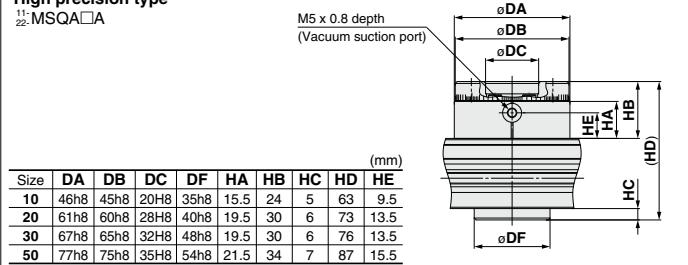

Size	AA	A	AU	AV	AW	AX	AY	BA	BB	BC	BD	BE	CA	CB	D	DD	DE	DF	DG	FA	FB	H	HC	J	JA	JB
10	55.4	50	6.6	20	15.5	12	4	9.5	34.5	27.8	60	27	4.5	28.5	45h9	46h9	20h9	35h9	17	8	4	20	5	6.8	11	6.5
20	70.8	65	7.6	27.5	16	14	5	12	46	29	76	34	6	30.5	60h9	61h9	28h9	40h9	19	10	6	22	6	8.6	14	8.5
30	75.4	70	7.6	29	18.5	14	5	12	50	32	84	37	6.5	33.5	65h9	67h9	32h9	48h9	24	10	4.5	22	6	8.6	14	8.5
50	85.4	80	10	38	22	19	6	15.5	63	37.5	100	50	10	37.5	75h9	77h9	35h9	54h9	28	12	5	24	7	10.5	18	10.5

Size	JC	JD	JJ	P	Q	S	SD	SE	SF	SU	WA	WB	WC	WD	WE	WF	XA	XB	YC	YA	YC			
10	M8 x 1.25	12	M5 x 0.8	M8 x 1	M5 x 0.8	34	92	9	13	45	17.7	59	15	3h9	3.5	M5 x 0.8	8	32	27	3h9	3.5	19	3h9	3.5
20	M10 x 1.5	15	M6 x 1	M10 x 1	M5 x 0.8	37	117	10	12	60	25	65	20.5	4h9	4.5	M6 x 1	10	43	36	4h9	4.5	24	4h9	4.5
30	M10 x 1.5	15	M6 x 1	M10 x 1	Rc1/8	40	127	11.5	14	65	25	68	23	4h9	4.5	M6 x 1	10	48	39	4h9	4.5	28	4h9	4.5
50	M12 x 1.75	18	M8 x 1.25	M14 x 1.5	Rc1/8	46	152	14.5	15	75	31.4	77	26.5	5h9	5.5	M8 x 1.25	12	55	45	5h9	5.5	33	5h9	5.5